

Los Alamos National Laboratory is operated by the University of California for the United States Department of Energy under contract W-7405-ENG-36.

LA-UR--93-922

DE93 010703

TITLE: "A SIMPLE MODEL FOR EXPLOSIVES FORMULATION"

AUTHOR(S): Tom Rivera

SUBMITTED TO: 1993 MAES National Symposium

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

MASTER

By acceptance of this article the publisher recognizes that the U.S. Government retains a nonexclusive, royalty-free license to publish or reproduce the published form of this contribution, or to allow others to do so, for U.S. Government purposes.

The Los Alamos National Laboratory requests that the publisher identify this article as work performed under the auspices of the U.S. Department of Energy.

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

Los Alamos Los Alamos National Laboratory
Los Alamos, New Mexico 87545



THOMAS RIVERA

Group M-1, Explosives Technology
Mail Stop C920
Los Alamos National Laboratory
Los Alamos, New Mexico 87545

EDUCATION:

B.S. Chemistry, 1962, College of Santa Fe, Santa Fe, New Mexico.

M.S. Physical Chemistry, 1973, University of New Mexico, Albuquerque, New Mexico.

Ph.D., Physical Chemistry, 1975, University of New Mexico.

1984 Graduate of Los Alamos National Laboratory Engineering Sciences Management Training Program.

WORK EXPERIENCE (Los Alamos):

1980 - present, Group M-1 Explosives Technology.

1972 - 1980, Group WX-3, Fabrication and Assembly.

Technical: Explosives materials development with emphasis on crystallization procedures, chemical analysis, materials characterization, and surface chemistry of high explosives. More recently, increased emphasis placed on Quality Assurance activities.

Administrative: Presently Section Leader of Analytical Chemistry and Quality Assurance and Program Coordinator for stockpile maintenance. Organized in 1982, and managed to a successful conclusion in 1987, a multi-Directorate, interdisciplinary program, "Fundamental Research on Explosives." Managed a variety of DoD and other government agency reimbursible programs at the Laboratory.



A SIMPLE MODEL FOR EXPLOSIVES' FORMULATION

Thomas Rivera
Los Alamos National Laboratory
Los Alamos, NM 87545

ABSTRACT

A simple model based on surface chemistry is developed. This model is based on relatively simple concepts of contact angle, wetting and spreading. The results of the modeling can be stated by two simplified "rules of thumb": 1) A liquid will spread on the surface of a solid if the surface tension of the liquid is less than the surface free energy of the solid, and 2) The liquid having the surface tension nearest that of the solid will preferentially wet the surface of the solid. These two rules can then be used to define the parameters that constitute a process for formulating a plastic bonded explosive (PBX), which is a crystalline high-explosive material coated with a small amount of plastic polymeric material (the binder). The PBX then can be pressed to a high density, and machined to a specific shape. The pressed and machined explosive material can then be used in a physics experiment to study fundamental properties of either the explosive or some other material.

INTRODUCTION

Explosives can be formulated into a material appropriate for pressing into a high-density solid by coating the explosive crystals with a suitable plastic. The resulting composite or plastic-bonded explosive (PBX) can then be safely machined into a variety of shapes suitable for detonation physics experiments.

DEVELOPMENT

The formulation of a PBX represents a problem in surface chemistry that can be addressed using a simplified model based on the concept of contact angle. Figure 1 represents a drop of liquid resting on a uniform, perfectly flat solid surface.

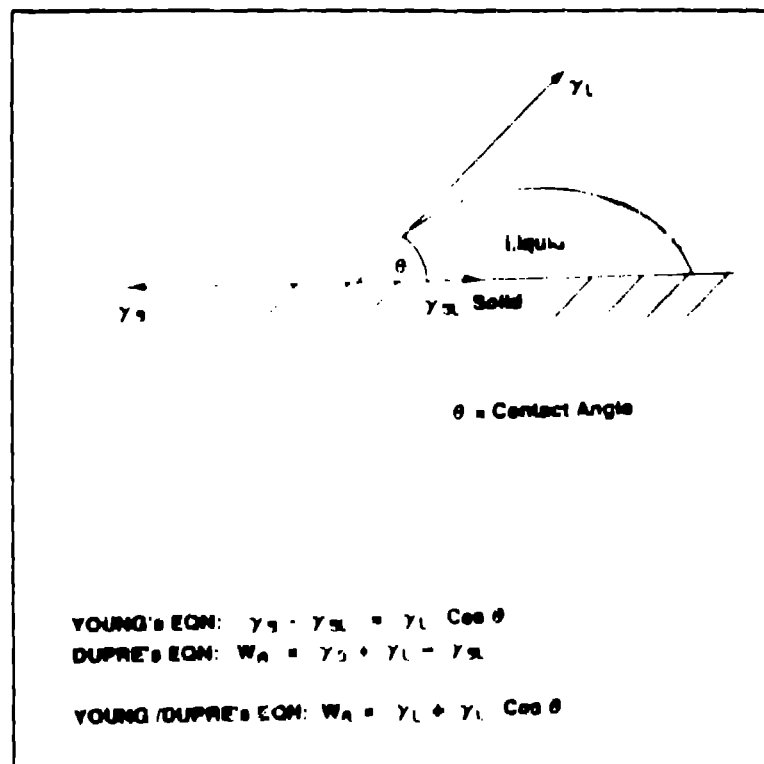


Figure 1 CONTACT ANGLE

In general, the drop will not spread completely over the surface, but its edge will make an angle θ with the solid as shown in the figure. At its simplest, the theory of the contact angle allows us to resolve the equilibrium surface tensions that result in a stable droplet. The Young equation,

$$\gamma_s - \gamma_{SL} = \gamma_L \cos \theta, \quad \text{Eqn. 1,}$$

where γ_s = solid surface tension, γ_L = liquid surface tension, and γ_{SL} = interfacial surface tension, is a statement of these results. The idea of contact angle is a rather practical concept since it can be measured using a variety of methods (see, for example, references 1, 2, and 3)..

The work of adhesion (W_A) measures the degree of wetting of a solid by a liquid. A high interfacial tension in a solid-liquid system indicates a low work of adhesion and conversely a low-interfacial tension is associated with a high work of adhesion.

The work of adhesion is defined by the equation

$$W_A = \gamma_s + \gamma_L - \gamma_{SL} \quad \text{Eqn. 2.}$$

Combining with Eqn. 1, we get the following equation:

$$W_A = \gamma_s + \gamma_L \cos \theta \quad \text{Eqn. 3.}$$

The quantity $\gamma_s - (\gamma_{SL} + \gamma_L)$ is a measure of the driving force behind the spreading process and is usually called the spreading coefficient (S). The spreading coefficient is defined by the equation:

$$S = \gamma_s - (\gamma_{SL} + \gamma_L) \quad \text{Eqn. 4.}$$

Thus, if S is positive, spreading can occur spontaneously; conversely, if S is negative the liquid will not spread spontaneously over the substrate.

We can see from Eqn. 4 that spreading is obtained as long as $\gamma_s > \gamma_L$. Under these conditions, the contact angle is zero, and $\cos \theta = 1$. Thus, from Eqn. 3 we see that the work of adhesion increases as γ_L increases for a given solid surface.

The results of the modeling can be stated by two simplified "rules of thumb": 1) A liquid will spread on the surface of a solid if the surface tension of the liquid is less than the surface tension (free energy) of the solid, and 2) The liquid having the surface tension nearest that of the solid will preferentially wet the surface of the solid. These two rules can then be used to define the parameters that constitute a process for formulating a PBX.

DISCUSSION

An example of a process for producing PBXs is one known as the Water-Slurry Process. The Water-Slurry Process was developed at Los Alamos about 1948 for producing HMX-based PBXs. HMX is a high explosive commonly used in the explosives industry. Figure 2 is a diagram representing the Water-Slurry Process in terms of surface tension.

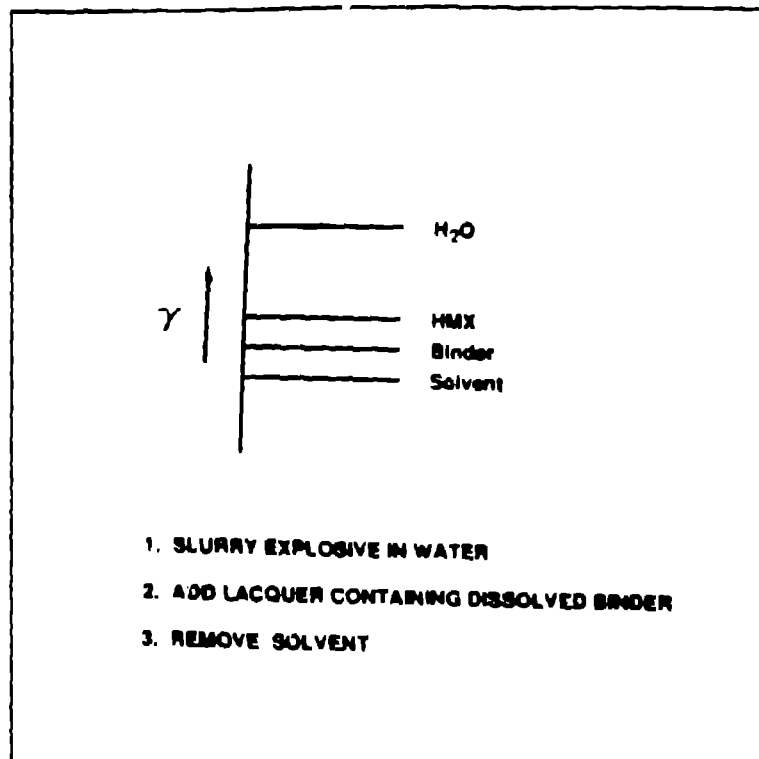


Figure 2 WATER-SLURRY PROCESS

In the Water-Slurry Process, the explosive is first mixed into a stirred pot containing a large volume of water. Since the HMX has a surface tension less than that of the water, the water has no affinity for the surface of the HMX. The slurry is stirred until a good dispersion of the HMX is made in the water. A lacquer, containing the binder dissolved in a volatile solvent is poured into the slurry and mixing is continued. The solvent is removed by distillation leaving behind the polymeric binder. The binder, having a surface tension less than that of the HMX has an affinity for its surface, and subsequently coats on the surface of the high explosive. The closer the binder surface tension is to that of the HMX, the better the coating. The coated HMX is filtered and dried, and a PBX is produced.

The PBX then can be pressed to a high density, and machined to a specific shape. The pressed and machined explosive material can then be used in a physics experiment to study some fundamental properties of the explosive or to study the properties of shocked material.

CONCLUSION

We have seen that the process for producing a PBX can be analyzed in terms of simple surface chemistry concepts. Changes in the process to accommodate different types of binders, explosives, etc., can be made based on predictions made using the model. The model can also be useful in the design of other coating processes.

REFERENCES

- J.T. Davies and E.K. Rideal, Interfacial Phenomena, (Academic Press, New York and London, 1961), Chap. 1.
- M.J. Rosen, Surfactants and Interfacial Phenomena, (John Wiley & Sons, Inc., New York, 1978), Chap. 6.
- J.M. Dallavalle, Micromeritics the Technology of Fine Particles, (Pitman Publishing Corporation, New York, 1948), Chap. 11.